



MYSTICAL GLAZED CERAMIC




MYSTICAL GLAZED CERAMIC

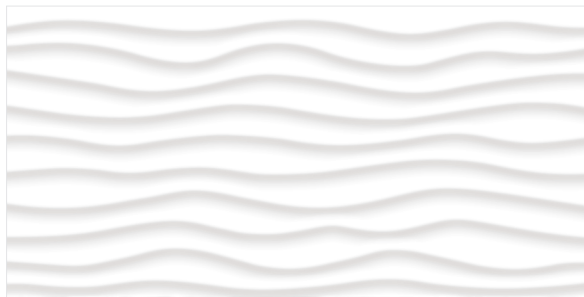

12 x 24 in (30 x 60 cm) MYSTICAL WHITE OBLIQUE RECTIFIED
WALL TILE GLOSSY

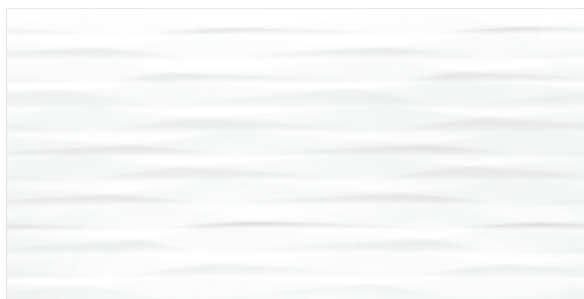

12 x 24 in (30 x 60 cm) MYSTICAL WHITE MODULATION RECTIFIED
WALL TILE GLOSSY

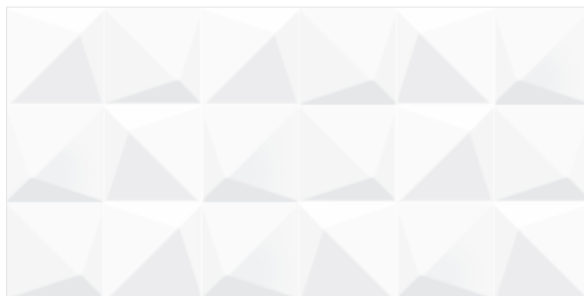


12 x 24 in (30 x 60 cm) MYSTICAL WHITE PRISMATIC RECTIFIED
WALL TILE GLOSSY



12 x 24 in (30 x 60 cm) MYSTICAL WHITE AMPLITUDE RECTIFIED
WALL TILE GLOSSY

MYSTICAL GLAZED CERAMIC



12 x 24 in (30 x 60 cm) MYSTICAL WHITE PLANE RECTIFIED
WALL TILE GLOSSY 4000-0043-1, MATTE

12 in (1.5 x 60 cm) MYSTICAL WHITE QUARTER
ROUND GLOSSY 4002-0033-1, MATTE

PACKAGING INFORMATION

DESCRIPTION	LBS/BOX	KGS/BOX	PCS/BOX	SQFT/BOX	M²/BOX	BXS/SKD	SQFT/SKID	M²/SKID
MYSTICAL								
12 x 24 in (30 x 60 cm) MYSTICAL RECTIFIED WALL TILE	56.49	25.62	8	15.5	1.44	32	496	46.08
12 in (1.5 x 60 cm) MYSTICAL QUARTER ROUND	7.50	3.4	60	N/A	N/A	45	2700 pcs.	2700 pcs.

TECHNICAL SPECIFICATIONS

DESCRIPTION	METHOD	UNIT	12 x 24 in (30 x 60 cm)	
			GLOSSY	MATTE
THICKNESS		mm	10 mm	9 mm
WATER ABSORPTION	ASTM C-373	(%)	10% ≤E ≤16% - P4	10% ≤E ≤16% - P4
BOND STRENGTH	ASTM C-373	>50 psi(0.34 Mpa)	Pass	Pass
COLOR UNIFORMITY	ASTM C-609		Pass	Pass
CRAZING RESISTANCE	ASTM C-424		Pass	Pass
THERMAL SHOCK	ASTM C-484		Pass	Pass
FROST RESISTANCE	ASTM C1026		Not Resistant	Not Resistant
SHADE VARIATION			V1	V1