


SASSI PORCELAIN TILE



SASSI PORCELAIN TILE

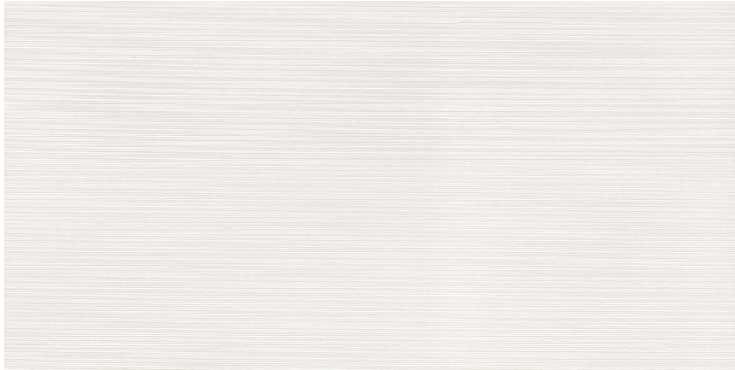

12" x 24" SASSI WHITE PORCELAIN TILE
BFC1224SW



1" x 1" SASSI WHITE MOSAICS
BFC11SW



1" x 1" SASSI BEIGE MOSAICS
BFC11SBG




12" x 24" SASSI BEIGE PORCELAIN TILE
BFC1224SBG


SASSI PORCELAIN TILE



12" x 24" SASSI MOCHA PORCELAIN TILE
BFC1224SM

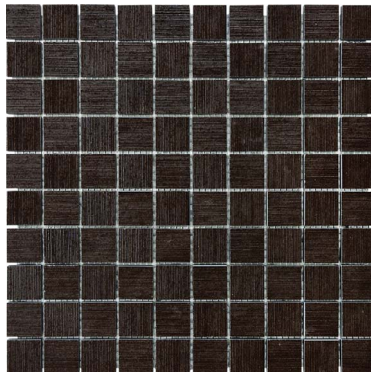

1" x 1" SASSI MOCHA MOSAICS
BFC11SM

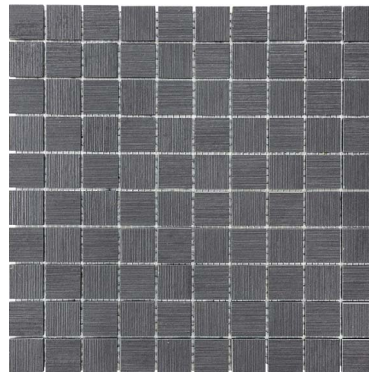

1" x 1" SASSI ANTHRACITE MOSAICS
BFC11SA




12" x 24" SASSI ANTHRACITE PORCELAIN TILE
BFC1224SA


SASSI PORCELAIN TILE



12" x 24" SASSI BLACK PORCELAIN TILE
BFC1224SBL

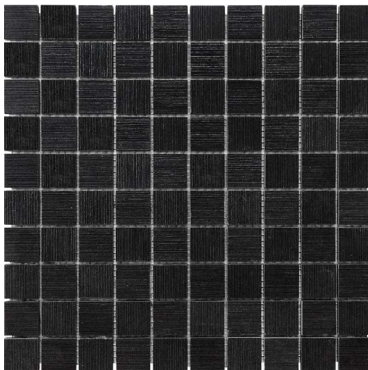

1" x 1" SASSI BLACK MOSAICS
BFC11SBL



3" x 24" SASSI WHITE LISTELLO
BFC324SWL



3" x 24" SASSI MOCHA LISTELLO
BFC324SML



3" x 24" SASSI BLACK LISTELLO
BFC324SBL

SASSI PORCELAIN TILE

PACKAGING INFORMATION

DESCRIPTION	LBS/BOX	PCS/BOX	SQFT/BOX	BOXES/SKID	SQFT/SKID
12" x 24" SASSI PORCELAIN TILE	71	8	16	32	512
1" x 1" SASSI MOSAICS	39.39	10	10	48	480
3" x 24" SASSI LISTELLO	22.08	10	n/a	36	360 pcs.

GENERAL SPECIFICATIONS

DESCRIPTION	METHOD	UNIT	12" x 24"
THICKNESS		mm – in	10 mm – 3/8"
WATER ABSORPTION	EN ISO 10545-3	(%)	≤ 0.1
DEEP ABRASION	EN ISO 10545-6	(mm ³)	120
SCRATCH HARDNESS		(Mohs)	8
BREAKING STRENGTH	EN ISO 10545-4	(lbf)	≥ 450
CHEMICAL RESISTANCE	EN ISO 10545-13	(UL)	Class A – Resistant
FROST RESISTANCE	EN ISO 10545-12		Resistant
STATIC COEFFICIENT OF FRICTION (WET)	ASTM C-1028	(μ)	≥ 0.60
STATIC COEFFICIENT OF FRICTION (DRY)	ASTM C-1028	(μ)	≥ 0.90
DCOF (WET)	ANSI B101.3		≥ 0.42
SHADE VARIATION			V1