

MARRAKESH HD CERAMIC & PORCELAIN TILE



MARRAKESH HD CERAMIC & PORCELAIN TILE



8" x 8" MARRAKESH COLOR MIX HD GLOSSY CERAMIC TILE

MARRAKESH HD CERAMIC & PORCELAIN TILE




8" x 8" MARRAKESH COLOR MIX HD GLOSSY CERAMIC TILE
BFP88MPC



8" x 8" MARRAKESH COLOR MIX HD MATTE PORCELAIN TILE
BFP88MMC

MARRAKESH HD CERAMIC & PORCELAIN TILE

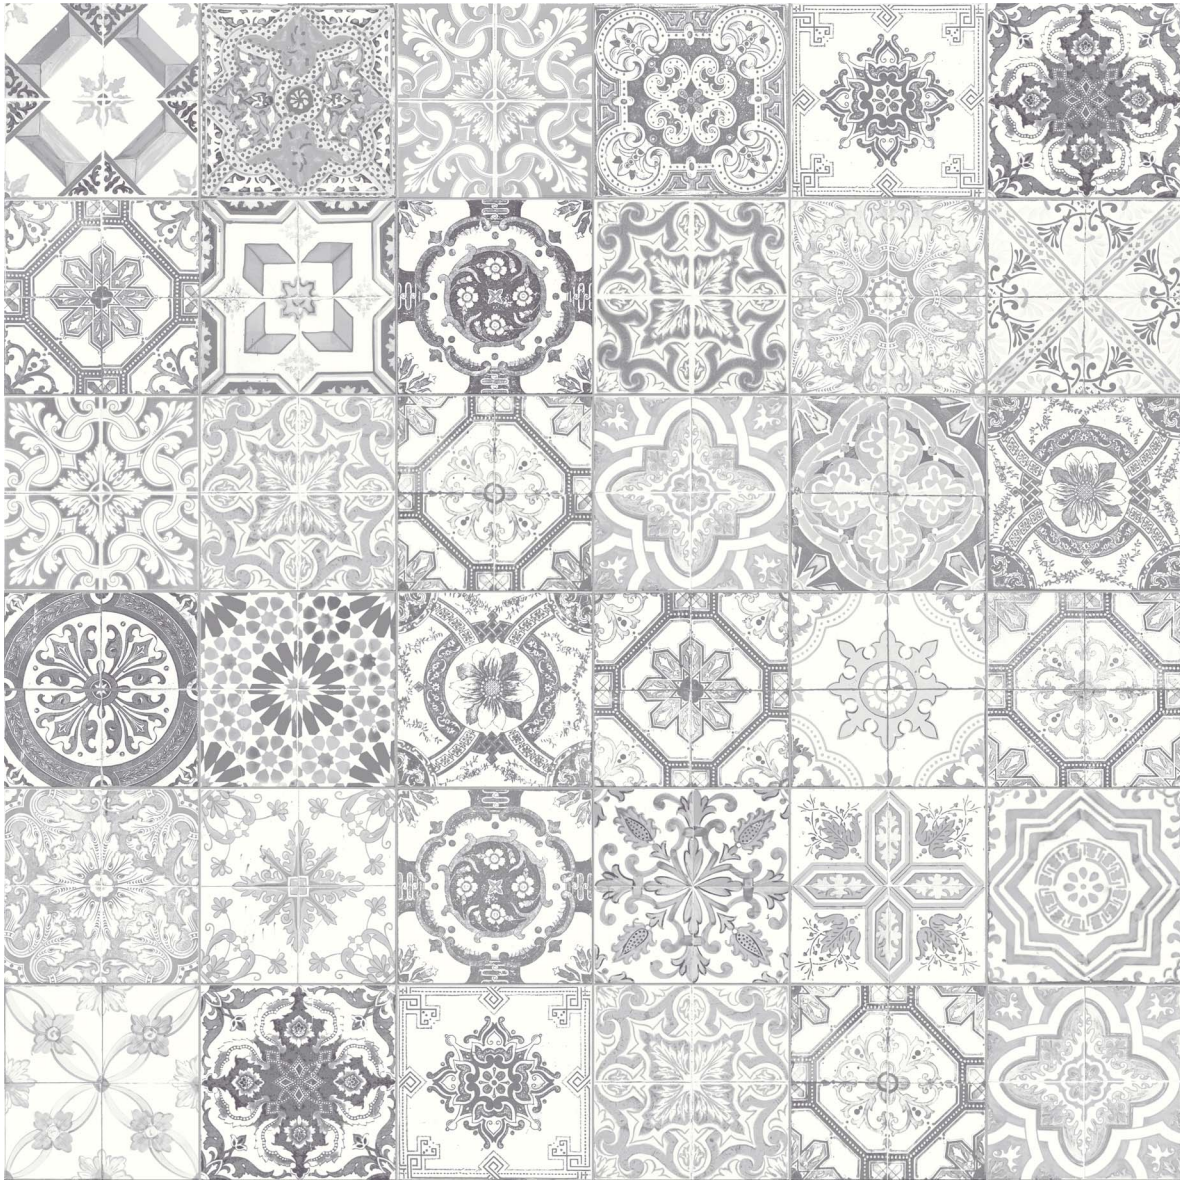

8" x 8" MARRAKESH GREY MIX HD GLOSSY CERAMIC TILE

MARRAKESH HD CERAMIC & PORCELAIN TILE



8" x 8" MARRAKESH GREY MIX HD GLOSSY CERAMIC TILE
BFP88MPG



8" x 8" MARRAKESH GREY MIX HD MATTE PORCELAIN TILE
BFP88MMG

MARRAKESH HD CERAMIC & PORCELAIN TILE

PACKAGING INFORMATION

DESCRIPTION	LBS/BOX	PCS/BOX	SQFT/BOX	BOXES/SKID	SQFT/SKID
8" x 8" MARRAKESH COLOR MIX HD GLOSSY CERAMIC TILE	34.33	25	10.76	72	774.72
8" x 8" MARRAKESH COLOR MIX HD MATTE PORCELAIN TILE	33.77	25	10.76	72	774.72
8" x 8" MARRAKESH GREY MIX HD GLOSSY CERAMIC TILE	35.12	25	10.76	72	774.72
8" x 8" MARRAKESH GREY MIX HD MATTE PORCELAIN TILE	33.77	25	10.76	72	774.72

GENERAL SPECIFICATIONS

DESCRIPTION	METHOD	UNIT	8" x 8" Matte	8" x 8" Glossy
THICKNESS		mm – in	7 mm – 9/32"	7 mm – 9/32"
WATER ABSORPTION	EN ISO 10545-3	(%)	≤ 0.5	≤ 3
ABRASION RESISTANCE	EN ISO 10545-7	(PEI)	4	4
SCRATCH HARDNESS		(Mohs)	6	5
BREAKING STRENGTH	EN ISO 10545-4	(lbf)	≥ 300	≥ 250
CHEMICAL RESISTANCE	EN ISO 10545-13	(GL)	Class A – Resistant	Class A – Resistant
FROST RESISTANCE	EN ISO 10545-12		Resistant	Resistant
STATIC COEFFICIENT OF FRICTION (WET)	ASTM C-1028	(μ)	≥ 0.70	-
STATIC COEFFICIENT OF FRICTION (DRY)	ASTM C-1028	(μ)	≥ 0.60	-
DCOF (WET)	ANSI B101.3		≥ 0.42	< 0.42
SHADE VARIATION			V4	V4