

MALENA CERAMIC TILE



MALENA CERAMIC TILE



3" x 10" MALENA IVORY CERAMIC BULLNOSE
BFC310BNMIV




3" x 13" MALENA IVORY CERAMIC BULLNOSE
BFC313BNMIV



10" x 16" MALENA IVORY CERAMIC WALL TILE
BFC1016MIV



13" x 13" MALENA IVORY CERAMIC FLOOR TILE
BFC1313MIV

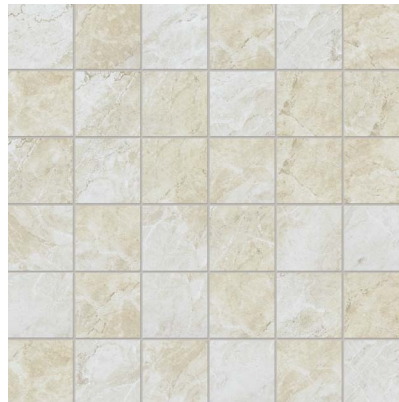

2" x 2" MALENA IVORY MOSAICS
BFC22MIV

MALENA CERAMIC TILE



3" x 10" MALENA ICE CERAMIC BULLNOSE
BFC310BNMIC



3" x 13" MALENA ICE CERAMIC BULLNOSE
BFC313BNMIC



10" x 16" MALENA ICE CERAMIC WALL TILE
BFC1016MIC



13" x 13" MALENA ICE CERAMIC FLOOR TILE
BFC1313MIC



2" x 2" MALENA ICE MOSAICS
BFC22MIC

MALENA CERAMIC TILE



3" x 10" MALENA CARBON CERAMIC BULLNOSE
BFC310BNMCA



3" x 13" MALENA CARBON CERAMIC BULLNOSE
BFC313BNMCA



10" x 16" MALENA CARBON CERAMIC WALL TILE
BFC1016MCA



13" x 13" MALENA CARBON CERAMIC FLOOR TILE
BFC1313MCA



2" x 2" MALENA CARBON MOSAICS
BFC22MCA

MALENA CERAMIC TILE

PACKAGING INFORMATION

DESCRIPTION	LBS/BOX	PCS/BOX	SQFT/BOX	BOXES/SKID	SQFT/SKID
13" x 13" MALENA CERAMIC FLOOR TILE	44.24	11	12.91	58	748.90
10" x 16" MALENA CERAMIC WALL TILE	42.00	14	15.06	48	723.07
2" x 2" MALENA MOSAICS	40.00	10	11.74	48	563.52
3" x 13" MALENA CERAMIC BULLNOSE	21.00	21	n/a	84	1764 pcs.
3" x 10" MALENA CERAMIC BULLNOSE	15.00	25	n/a	98	2450 pcs.

GENERAL SPECIFICATIONS

DESCRIPTION	METHOD	UNIT	13" x 13"
THICKNESS		mm – in	7.6 mm – 5/16"
WATER ABSORPTION	EN ISO 10545-3	(%)	≤ 3
ABRASION RESISTANCE	EN ISO 10545-7	(PEI)	4
SCRATCH HARDNESS		(Mohs)	6
BREAKING STRENGTH	EN ISO 10545-4	(lbf)	≥ 250
CHEMICAL RESISTANCE	EN ISO 10545-13	(GL)	Class A – Resistant
FROST RESISTANCE	EN ISO 10545-12		Resistant
STATIC COEFFICIENT OF FRICTION (WET)	ASTM C-1028	(μ)	< 0.60
STATIC COEFFICIENT OF FRICTION (DRY)	ASTM C-1028	(μ)	≥ 0.80
DCOF (WET)	ANSI B101.3		< 0.42
SHADE VARIATION			V2